

International Patent Classification 6 :	WO 99/65011
G09C 3/30, G09F 9/23	
A2	
(11) International Publication Number:	
(43) International Publication Date	16 December 1999 (16.12.99)

(43) International Publication Date: 16 December 1999 (16.12.99)

(81) Designated States: JP, European patent (A1, B2, C1, C2, D2, D6, E1, E2, F1, F2, G1, G2, H1, H2, I1, I2, L1, L2, M1, M2, N1, N2, P1, P2, R1, R2, S1, S2, T1, T2, U1, U2, V1, V2, W1, W2, X1, X2, Y1, Y2, Z1, Z2), DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE.


Published
Without international search report and to be republished
upon receipt of that report.

(71) *Applicable (for SE only): PHILIPS AD 150SE; Kortbyggen 7 Kista, S-164 85 Stockholm (SE).*

(74) Agent: WILLIAMSON, Paul, L.; Prof. Holstian 6, NL-5656
AA Eindhoven (NL).

(57) Abstract:

A active matrix, electroluminescent display device has an array of current-driven electrically addressed elements (10), for example, comprising organic electroluminescent material, whose operation is each controlled by a associated switching means (11) to which a voltage signal for determining a desired light output is applied in a respective address period, which is arranged to drive the display element as coding to the drive signal following the address coding. Each switching means consists a current mirror circuit (21, 31) in which the transistor (20) is used to both sense and produce the required drive current for the display element (10) with the gate of the transistor being connected to a storage capacitance (32) on which a voltage determined by the drive signal is stored. This allows variations in transistor characteristics over the array to be compensated and improved uniformity of light output from the display elements to be obtained.

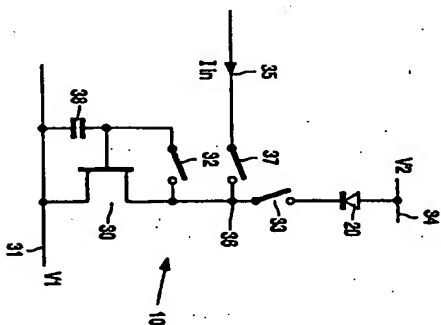

2002-5/17806877

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT

AL	Albania	E9	Spain	L3	Luxembourg	5K	South Korea
AM	Armenia	F9	Finland	L7	Lithuania	5L	Sweden
AN	Antigua	FA	France	LU	Liechtenstein	5M	Switzerland
AU	Australia	GA	Ghana	LV	Latvia	5N	Switzerland
AZ	Azerbaijan	GB	Great Britain	MC	Monaco	5O	Switzerland
BA	Bosnia and Herzegovina	CE	Croatia	MD	Moldova	5P	Switzerland
BB	Barbados	CH	China	MO	Mongolia	5Q	Switzerland
BE	Belgium	CI	Ivory Coast	MP	Macau	5R	Switzerland
BG	Bulgaria	CM	Cameroon	MS	Malaysia	5S	Switzerland
BF	Burkina Faso	CO	Colombia	MT	Malta	5T	Switzerland
BO	Bolivia	CV	Cape Verde	MA	Maldives	5U	Switzerland
BR	Brazil	DE	Germany	MC	Madagascar	5V	Switzerland
BS	Bahamas	DK	Denmark	MD	Moldova	5W	Switzerland
BT	Bhutan	EE	Estonia	ME	Montenegro	5X	Switzerland
BV	Bermuda	FI	Finland	MG	Madagascar	5Y	Switzerland
BY	Belarus	FR	France	ML	Mali	5Z	Switzerland
CA	Canada	GB	Great Britain	MM	Myanmar	5A	Switzerland
CC	Cocos (Keeling) Islands	GE	Georgia	MR	Morocco	5B	Switzerland
CD	Congo (Kinshasa)	GR	Greece	MS	Maldives	5C	Switzerland
CE	Czech Republic	GU	Guam	MT	Malta	5D	Switzerland
CF	Cote d'Ivoire	HN	Honduras	MA	Maldives	5E	Switzerland
CH	Switzerland	IE	Ireland	MC	Monaco	5F	Switzerland
CI	Cote d'Ivoire	IN	India	MD	Moldova	5G	Switzerland
CJ	Croatia	IT	Italy	ME	Montenegro	5H	Switzerland
CK	Cook Islands	JP	Japan	MF	Maldives	5I	Switzerland
CL	Chile	KE	Kenya	MW	Malawi	5J	Switzerland
CM	Cameroon	KG	Kyrgyzstan	MX	Mexico	5K	Switzerland
CN	China	KH	Kampuchea	MY	Malaysia	5L	Switzerland
CO	Colombia	KI	Kiribati	NA	Namibia	5M	Switzerland
CU	Cuba	KM	Komoros	NC	New Caledonia	5N	Switzerland
CV	Cape Verde	KP	Korea (North)	NE	Niger	5O	Switzerland
CX	Christmas Island	KR	Korea (South)	NF	Norfolk Island	5P	Switzerland
CY	Cyprus	LA	Laos	NG	Nigeria	5Q	Switzerland
CZ	Czech Republic	LC	Liechtenstein	NH	Netherlands	5R	Switzerland
DE	Germany	LI	Liechtenstein	NI	Nicaragua	5S	Switzerland
DK	Denmark	LT	Lithuania	NL	Netherlands	5T	Switzerland
DL	Dominica	LU	Luxembourg	NO	Norway	5U	Switzerland
DM	Dominican Republic	LV	Latvia	NZ	New Zealand	5V	Switzerland
DO	Dominican Republic	MA	Maldives	OM	Oman	5W	Switzerland
DZ	Algeria	MC	Monaco	PA	Panama	5X	Switzerland
EA	Spain	MD	Moldova	PE	Peru	5Y	Switzerland
EC	Ecuador	ME	Montenegro	PF	Poland	5Z	Switzerland
EE	Estonia	MG	Madagascar	PG	Papua New Guinea	5A	Switzerland
EG	Egypt	MH	Maldives	PH	Philippines	5B	Switzerland
EH	Western Sahara	MI	Maldives	PK	Pakistan	5C	Switzerland
ER	Eritrea	ML	Maldives	PL	Poland	5D	Switzerland
ES	Spain	MM	Myanmar	PM	Puerto Rico	5E	Switzerland
ET	Ethiopia	MO	Macao	PN	Puerto Rico	5F	Switzerland
EU	European Union	MP	Macau	PT	Portugal	5G	Switzerland
EV	Vanuatu	MQ	Martinique	QA	Qatar	5H	Switzerland
EW	Western Sahara	MR	Morocco	RE	Reunion	5I	Switzerland
EX	Christmas Island	MS	Malaysia	RO	Romania	5J	Switzerland
EY	Yemen	MT	Malta	RU	Russia	5K	Switzerland
EZ	Zambia	MA	Maldives	SA	Saudi Arabia	5L	Switzerland
FA	French Polynesia	MC	Monaco	SD	Sudan	5M	Switzerland
FB	French Polynesia	MD	Moldova	SE	Sweden	5N	Switzerland
FC	Falkland Islands	ME	Montenegro	SI	Slovenia	5O	Switzerland
FD	Federated States of Micronesia	MG	Madagascar	SK	Slovakia	5P	Switzerland
FE	Federated States of Micronesia	ML	Maldives	SL	Sierra Leone	5Q	Switzerland
FF	Federated States of Micronesia	MM	Myanmar	SM	San Marino	5R	Switzerland
FG	Federated States of Micronesia	MN	Mongolia	SN	Senegal	5S	Switzerland
FH	Federated States of Micronesia	MO	Macao	SO	Swaziland	5T	Switzerland
FI	Federated States of Micronesia	MP	Macau	SR	Suriname	5U	Switzerland
FJ	Fiji	MQ	Martinique	SS	South Sudan	5V	Switzerland
FK	Falkland Islands	MR	Morocco	ST	Timor-Leste	5W	Switzerland
FL	Falkland Islands	MS	Malaysia	SV	El Salvador	5X	Switzerland
FM	Federated States of Micronesia	MT	Malta	SW	Swaziland	5Y	Switzerland
FN	Federated States of Micronesia	MA	Maldives	TX	Texas	5Z	Switzerland
FO	Federated States of Micronesia	MC	Monaco	UA	Ukraine	5A	Switzerland
FP	Federated States of Micronesia	MD	Moldova	UG	Uganda	5B	Switzerland
FQ	Federated States of Micronesia	ME	Montenegro	US	United States of America	5C	Switzerland
FR	Federated States of Micronesia	MG	Madagascar	UZ	Uzbekistan	5D	Switzerland
FS	Federated States of Micronesia	MH	Maldives	VE	Venezuela	5E	Switzerland
FT	Federated States of Micronesia	MI	Maldives	VN	Viet Nam	5F	Switzerland
FU	Federated States of Micronesia	MM	Myanmar	VU	Vanuatu	5G	Switzerland
FV	Federated States of Micronesia	MN	Mongolia	WV	West Virginia	5H	Switzerland
FW	Federated States of Micronesia	MO	Macao	WY	Wyoming	5I	Switzerland
FX	Federated States of Micronesia	MP	Macau	XZ	Christmas Island	5J	Switzerland
FY	Federated States of Micronesia	MQ	Martinique	YU	Yugoslavia	5K	Switzerland
FZ	Federated States of Micronesia	MR	Morocco	ZA	Zambia	5L	Switzerland
GA	Ghana	MS	Malaysia	ZB	Zimbabwe	5M	Switzerland
GB	Great Britain	MT	Malta	ZC	Zimbabwe	5N	Switzerland
GC	Guernsey	MA	Maldives	ZD	Zimbabwe	5O	Switzerland
GD	Grenada	MC	Monaco	ZE	Zimbabwe	5P	Switzerland
GE	Georgia	MD	Moldova	ZF	Zimbabwe	5Q	Switzerland
GF	Guadeloupe	ME	Montenegro	ZG	Zimbabwe	5R	Switzerland
GG	Guernsey	MG	Madagascar	ZH	Zimbabwe	5S	Switzerland
GH	Ghana	MH	Maldives	ZI	Zimbabwe	5T	Switzerland
GI	Guinea	MI	Maldives	ZJ	Zimbabwe	5U	Switzerland
GJ	Guernsey	MM	Myanmar	ZK	Zimbabwe	5V	Switzerland
GK	Guernsey	MN	Mongolia	ZL	Zimbabwe	5W	Switzerland
GL	Greenland	MO	Macao	ZM	Zimbabwe	5X	Switzerland
GM	Guernsey	MP	Macau	ZN	Zimbabwe	5Y	Switzerland
GN	Guinea	MQ	Martinique	ZO	Zimbabwe	5Z	Switzerland
GO	Guernsey	MR	Morocco	ZA	Zambia	5A	Switzerland
GP	Guernsey	MS	Malaysia	ZB	Zimbabwe	5B	Switzerland
GQ	Guernsey	MT	Malta	ZC	Zimbabwe	5C	Switzerland
GR	Greece	MA	Maldives	ZD	Zimbabwe	5D	Switzerland
GS	Georgia	MC	Monaco	ZE	Zimbabwe	5E	Switzerland
GT	Guatemala	MD	Moldova	ZF	Zimbabwe	5F	Switzerland
GU	Guam	ME	Montenegro	ZG	Zimbabwe	5G	Switzerland
GV	Guernsey	MG	Madagascar	ZH	Zimbabwe	5H	Switzerland
GW	Guinea	MH	Maldives	ZI	Zimbabwe	5I	Switzerland
GX	Guernsey	MI	Maldives	ZJ	Zimbabwe	5J	Switzerland
GY	Guernsey	MM	Myanmar	ZK	Zimbabwe	5K	Switzerland
HK	Hong Kong	MN	Mongolia	ZL	Zimbabwe	5L	Switzerland
HL	Holsten	MO	Macao	ZM	Zimbabwe	5M	Switzerland
HM	Holsten	MP	Macau	ZN	Zimbabwe	5N	Switzerland
HN	Holsten	MQ	Martinique	ZO	Zimbabwe	5O	Switzerland
HO	Holsten	MR	Morocco	ZA	Zambia	5P	Switzerland
HP	Holsten	MS	Malaysia	ZB	Zimbabwe	5Q	Switzerland
HQ	Holsten	MT	Malta	ZC	Zimbabwe	5R	Switzerland
HR	Holsten	MA	Maldives	ZD	Zimbabwe	5S	Switzerland
HS	Holsten	MC	Monaco	ZE	Zimbabwe	5T	Switzerland
HT	Holsten	MD	Moldova	ZF	Zimbabwe	5U	Switzerland
HU	Hungary	ME	Montenegro	ZG	Zimbabwe	5V	Switzerland
HV	Holsten	MG	Madagascar	ZH	Zimbabwe	5W	Switzerland
HW	Holsten	MH	Maldives	ZI	Zimbabwe	5X	Switzerland
HY	Holsten	MI	Maldives	ZJ	Zimbabwe	5Y	Switzerland
HZ	Holsten	MM	Myanmar	ZK	Zimbabwe	5Z	Switzerland
IA	Iceland	MN	Mongolia	ZL	Zimbabwe	5A	Switzerland
IB	Iceland	MO	Macao	ZM	Zimbabwe	5B	Switzerland
IC	Iceland	MP	Macau	ZN	Zimbabwe	5C	Switzerland
ID	Indonesia	MQ	Martinique	ZO	Zimbabwe	5D	Switzerland
IE	Ireland	MR	Morocco	ZA	Zambia	5E	Switzerland
IF	Iceland	MS	Malaysia	ZB	Zimbabwe	5F	Switzerland
IG	Iceland	MT	Malta	ZC	Zimbabwe	5G	Switzerland
IH	Iceland	MA	Maldives	ZD	Zimbabwe	5H	Switzerland
II	Iceland	MC	Monaco	ZE	Zimbabwe	5I	Switzerland
IL	Israel	MD	Moldova	ZF	Zimbabwe	5J	Switzerland
IM	Iceland	ME	Montenegro	ZG	Zimbabwe	5K	Switzerland
IN	India	MG	Madagascar	ZH	Zimbabwe	5L	Switzerland
IO	Iceland	MH	Maldives	ZI	Zimbabwe	5M	Switzerland
IP	Iceland	MI	Maldives	ZJ	Zimbabwe	5N	Switzerland
IQ	Iceland	MM	Myanmar	ZK	Zimbabwe	5O	Switzerland
IR	Iceland	MN	Mongolia	ZL	Zimbabwe	5P	Switzerland
IS	Iceland	MO	Macao	ZM	Zimbabwe	5Q	Switzerland
IT	Italy	MP	Macau	ZN	Zimbabwe	5R	Switzerland
IU	Iceland	MQ	Martinique	ZO	Zimbabwe	5S	Switzerland
IV	Iceland	MR	Morocco	ZA	Zambia	5T	Switzerland
IV	Iceland	MS	Malaysia	ZB	Zimbabwe	5U	Switzerland
IW	Iceland	MT	Malta	ZC	Zimbabwe	5V	Switzerland
IX	Iceland	MA	Maldives	ZD	Zimbabwe	5W	Switzerland
IY	Iceland	MC	Monaco	ZE	Zimbabwe	5X	Switzerland
IZ	Iceland	MD	Moldova	ZF	Zimbabwe	5Y	Switzerland
JA	Japan	ME	Montenegro	ZG	Zimbabwe	5Z	Switzerland
JB	Japan	MG	Madagascar	ZH	Zimbabwe	5A	Switzerland
JC	Japan	MH	Maldives	ZI	Zimbabwe	5B	Switzerland
JD	Japan	MI	Maldives	ZJ	Zimbabwe	5C	Switzerland
JE	Japan	MM	Myanmar	ZK	Zimbabwe	5D	Switzerland
JF	Japan	MN	Mongolia	ZL	Zimbabwe	5E	Switzerland
JG	Japan	MO	Macao	ZM	Zimbabwe	5F	Switzerland
JH	Japan	MP	Macau	ZN	Zimbabwe	5G	Switzerland
JI	Japan	MQ	Martinique	ZO	Zimbabwe	5H	Switzerland
JJ	Japan	MR	Morocco	ZA	Zambia	5I	Switzerland
JK	Japan	MS	Malaysia	ZB	Zimbabwe	5J	Switzerland
JL	Japan	MT	Malta	ZC	Zimbabwe	5K	Switzerland
JM	Japan	MA	Maldives	ZD	Zimbabwe	5L	Switzerland
JN	Japan	MC	Monaco	ZE	Zimbabwe	5M	Switzerland
JO	Japan	MD	Moldova	ZF	Zimbabwe	5N	Switzerland
JP	Japan	ME	Montenegro	ZG	Zimbabwe	5O	Switzerland
JQ	Japan	MG	Madagascar	ZH	Zimbabwe	5P	Switzerland
JR	Japan	MH	Maldives	ZI	Zimbabwe	5Q	Switzerland
JS	Japan	MI	Maldives	ZJ	Zimbabwe	5R	Switzerland
JT	Japan	MM	Myanmar	ZK	Zimbabwe	5S	Switzerland
JU	Japan	MN	Mongolia	ZL	Zimbabwe	5T	Switzerland
JV	Japan	MO	Macao	ZM	Zimbabwe	5U	Switzerland
JW	Japan	MP	Macau	ZN	Zimbabwe	5V	Switzerland
JX	Japan	MQ	Martinique	ZO	Zimbabwe	5W	Switzerland
JY	Japan	MR	Morocco	ZA	Zambia	5X	Switzerland
JZ	Japan	MS	Malaysia	ZB	Zimbabwe	5Y	Switzerland
KA	Kazakhstan	MT	Malta	ZC	Zimbabwe	5Z	Switzerland
KB	Kazakhstan	MA	Maldives	ZD	Zimbabwe	5A	Switzerland
KC	Kazakhstan	MC	Monaco	ZE	Zimbabwe	5B	Switzerland
KD	Kazakhstan	MD	Moldova	ZF	Zimbabwe	5C	Switzerland
KE	Kenya	ME	Montenegro	ZG	Zimbabwe	5D	Switzerland
KF	Kenya	MG	Madagascar	ZH	Zimbabwe	5E	Switzerland
KG	Kyrgyzstan	MH	Maldives	ZI	Zimbabwe	5F	Switzerland
KH	Kazakhstan	MI	Maldives	ZJ	Zimbabwe	5G	Switzerland
KI	Kazakhstan	MM	Myanmar	ZK	Zimbabwe	5H	Switzerland
KJ	Kazakhstan	MN	Mongolia	ZL	Zimbabwe	5I	Switzerland
KK	Kazakhstan	MO	Macao	ZM	Zimbabwe	5J	Switzerland
KL	Kazakhstan	MP	Macau	ZN	Zimbabwe	5K	Switzerland
KM	Kazakhstan	MQ	Martinique	ZO	Zimbabwe	5L	Switzerland
KN	Kazakhstan	MR	Morocco	ZA	Zambia	5M	Switzerland
KO	Kazakhstan	MS	Malaysia	ZB	Zimbabwe	5N	Switzerland
KP	Kazakhstan	MT	Malta	ZC	Zimbabwe	5O	Switzerland
KQ	Kazakhstan	MA	Maldives	ZD	Zimbabwe	5P	Switzerland
KR	Kazakhstan	MC	Monaco	ZE	Zimbabwe	5Q	Switzerland
KS	Kazakhstan	MD	Moldova	ZF	Zimbabwe	5R	Switzerland
KT	Kazakhstan	ME	Montenegro	ZG	Zimbabwe	5S	Switzerland
KU	Kazakhstan	MG	Madagascar	ZH	Zimbabwe	5T	Switzerland
KV	Kazakhstan	MH	Maldives	ZI	Zimbabwe	5U	Switzerland
KW	Kazakhstan	MI	Maldives	ZJ	Zimbabwe	5V	Switzerland
KX	Kazakhstan	MM	Myanmar	ZK	Zimbabwe	5W	Switzerland
KY	Kazakhstan	MN	Mongolia	ZL	Zimbabwe	5X	Switzerland
KZ	Kazakhstan	MO	Macao	ZM	Zimbabwe	5Y	Switzerland
LA	Laos	MP	Macau	ZN	Zimbabwe	5Z	Switzerland
LB	Laos	MQ	Martinique	ZO	Zimbabwe	5A	Switzerland
LC	Liechtenstein	MR	Morocco	ZA	Zambia	5B	Switzerland
LD	Liechtenstein	MS	Malaysia	ZB	Zimbabwe	5C	Switzerland
LE	Liechtenstein	MT	Malta	ZC	Zimbabwe	5D	Switzerland
LF	Liechtenstein	MA	Maldives	ZD	Zimbabwe	5E	Switzerland
LG	Liechtenstein	MC	Monaco	ZE	Zimbabwe	5F	Switzerland
LH	Liechtenstein	MD	Moldova	ZF	Zimbabwe	5G	Switzerland
LI	Liechtenstein	ME	Montenegro	ZG	Zimbabwe	5H	Switzerland
LJ	Liechtenstein	MG	Madagascar	ZH	Zimbabwe	5I	Switzerland
LK	Liechtenstein	MH	Maldives	ZI	Zimbabwe	5J	Switzerland
LL	Liechtenstein	MI	Maldives	ZJ	Zimbabwe	5K	Switzerland
LM	Liechtenstein	MM	Myanmar	ZK	Zimbabwe	5L	Switzerland
LN	Liechtenstein	MN	Mongolia	ZL	Zimbabwe	5M	Switzerland
LO	Liechtenstein	MO	Macao	ZM	Zimbabwe	5N	Switzerland
LP	Liechtenstein	MP	Macau	ZN	Zimbabwe	5O	Switzerland
LQ	Liechtenstein	MQ	Martinique	ZO	Zimbabwe	5P	Switzerland
LR	Liechtenstein	MR	Morocco	ZA	Zambia	5Q	Switzerland
LS	Liechtenstein	MS	Malaysia	ZB	Zimbabwe	5R	Switzerland
LT	Liechtenstein	MT	Malta	ZC	Zimbabwe	5S	Switzerland
LU	Liechtenstein	MA	Maldives	ZD	Zimbabwe	5T	Switzerland
LV							

DESCRIPTION

ACTIVE MATRIX ELECTROLUMINESCENT DISPLAY DEVICES

5 This invention relates to active matrix electroluminescent display devices comprising a matrix array of electroluminescent display elements each of which has an associated switching means for controlling the current through the display element, in accordance with an applied drive signal.

10 Matrix display devices employing electroluminescent, light-emitting, display elements are well known. As for the display elements organic thin film electroluminescent elements and light-emitting diodes (LEDs), comprising traditional III-V semiconductor compounds, have been used. In the main, such display devices have been of the passive type in which the electroluminescent display elements are connected between intersecting sets of row and column address lines and addressed in multiplexed fashion. Recent developments in (organic) polymer electroluminescent materials have demonstrated their ability to be used practically for video display purposes and the like.

20 Electroluminescent elements using such materials typically comprise one or more layers of a semiconducting conjugated polymer sandwiched between a pair of (anode and cathode) electrodes, one of which is transparent and the other of which is of a material suitable for injecting holes or electrons into the polymer layer. An example of such is described in an article by D. Braun and A. J. Heeger in Applied Physics Letters 58 (18) p.p. 1982-1984 (6th May 1991). By suitable choice of the conjugated polymer chain and side chains, it is possible to adjust the bandgap, electron affinity and the ionisation potential of the polymer. An active layer of such a material can be fabricated using a CVD process or simply by a spin-coating technique using a solution of a soluble conjugated polymer. Through these processes, LEDs and displays with large light-emitting surfaces can be produced.

30 Organic electroluminescent materials offer advantages in that they are very

efficient and require relatively low (DC) drive voltages. Moreover, in contrast to conventional LCDs, no backlight is required. In a simple matrix display device, the material is provided between sets of row and column address conductors at their intersections thereby forming a row and column array of electroluminescent display elements. By virtue of the diode-like I-V characteristic of the organic electroluminescent display elements, each element is capable of providing both a display and a switching function enabling multiplexed drive operation. However, when driving this simple matrix arrangement on a conventional row at a time scanning basis each display element is driven to emit light for only a small fraction of the overall field time, corresponding to a row address period. In the case of an array having N rows for example, each display element can emit light for a period equal to t/N at most where t is the field period. In order then to obtain a desired mean brightness from the display, it is necessary that the peak brightness produced by each element must be at least N times the required mean brightness and the peak display element current will be at least N times the mean current. The resulting high peak currents cause problems, notably with the more rapid degradation of the display element lifetime and with voltage drops caused along the row address conductors.

20 One solution to these problems is to incorporate the display elements into an active matrix whereby each display element has an associated switch means which is operable to supply a drive current to the display element so as to maintain its light output for a significantly longer period than the row address period. Thus, for example, each display element circuit is loaded with an analogue (display data) drive signal once per field period in a respective row address period which drive signal is stored and is effective to maintain a required drive current through the display element for a field period until the row of display elements concerned is next addressed. This reduces the peak brightness and the peak current required by each display element by a factor of approximately N for a display with N rows. An example of such an active matrix addressed electroluminescent display device is described in EP-A-0717446.

30 The conventional kind of active matrix circuitry used in LCDs cannot be used with electroluminescent display elements as such display elements need to

continuously pass current in order to generate light whereas the LC display elements are capacitive and therefore take virtually no current and allow the drive signal voltage to be stored in the capacitance for the whole field period. In the aforementioned publication, each switch means comprises two TFTs (thin film transistors) and a storage capacitor. The anode of the display element is connected to the drain of the second TFT and the first TFT is connected to the gate of the second TFT which is connected also to one side of the capacitor. During a row address period, the first TFT is turned on by means of a row selection (gating) signal and a drive (data) signal is transferred via this TFT to the capacitor. After the removal of the selection signal the first TFT turns off and the voltage stored on the capacitor, constituting a gate voltage for the second TFT, is responsible for operation of the second TFT which is arranged to deliver electrical current to the display element. The gate of the first TFT is connected to a gate line (row conductor) common to all display elements in the same row and the source of the first TFT is connected to a source line (column conductor) common to all display elements in the same column. The drain and source electrodes of the second TFT are connected to the anode of the display element and a ground line which extends parallel to the source line and is common to all display elements in the same column. The other side of the capacitor is also connected to this ground line. The active matrix structure is fabricated on a suitable transparent, insulating, support, for example of glass, using thin film deposition and process technology similar to that used in the manufacture of AMLCDs.

With this arrangement, the drive current for the light-emitting diode display element is determined by a voltage applied to the gate of the second TFT. This current therefore depends strongly on the characteristics of that TFT. Variations in threshold voltage, mobility and dimensions of the TFT will produce unwanted variations in the display element current, and hence its light output. Such variations in the second TFTs associated with display elements over the area of the array, or between different arrays, due, for example, to manufacturing processes, lead to non-uniformity of light outputs from the display elements.

It is an object of the present invention to provide an improved active matrix electroluminescent display device.

It is another object of the present invention to provide a display element circuit for an active matrix electroluminescent display device which reduces the effect of variations in the transistor characteristics on the light output of the display elements and hence improves the uniformity of the display.

This objective is achieved in the present invention by using a current mirror circuit for the switching means in which the same transistor is used to both sense and later produce the required drive current for the display element. This allows all variations in transistor characteristics to be compensated.

According to the present invention, there is provided an active matrix electroluminescent display device of the kind described in the opening paragraph, in which the switching means comprises a drive transistor whose first current - carrying terminal is connected to a first supply line, whose second current - carrying terminal is connected via the display element to a second supply line and whose gate is connected to its first current - carrying terminal via a capacitance, which is characterised in that the second current - carrying terminal of the drive transistor is connected to an input terminal for the drive signal and in that a switch device is connected between the second current - carrying terminal and the gate of the transistor which is operable during the application of a drive signal so as to store on the capacitance a gate voltage determined by the drive signal.

The arrangement of the switching means is such that it operates effectively in the manner of a single transistor current mirror circuit wherein the same transistor performs current sampling and current output functions. When the switch device is closed the transistor is diode connected and the input drive signal determines a current flow through the transistor and a consequential gate voltage which is stored on the capacitance. After the switch device opens, the transistor acts as a current source for the display element with the gate voltage determining the current level through the display element, and hence its brightness, which level is thereafter maintained, according to the set value, for

example until the display element is next addressed. Thus, in a first operating phase, in effect a display element addressing period, an input current is sampled and the transistor gate voltage set accordingly and in a subsequent output phase the transistor operates to draw a current through the display element corresponding to the sampled current. Because in this arrangement the same transistor is used both to sample the input current during the sampling phase and to generate the drive current for the display element during the output phase the display element current is not dependent on the threshold voltage, the mobility, or the exact geometry of the transistor. The aforementioned problems of non-uniformity of light outputs from the display elements over the array is thus overcome.

Preferably, the display elements are arranged in rows and columns, and the switch devices of the switching means for a row of display elements are connected to a respective, common, row address conductor via which a selection (scan) signal for operating the switch devices in that row is supplied, and each row address conductor is arranged to receive a selection signal in turn, whereby the rows of display elements are addressed one at a time in sequence. The drive signals (display data) for the display elements in a column are preferably supplied via a respective column address conductor common to the display elements in the column, there being a further switch device connected between the input terminal of the switching means of a display element and its associated column address conductor which is operable to transfer a drive signal on the column address conductor to the input terminal when the first - mentioned switch device is closed. To this end, the further switch device is preferably connected to the same row address conductor as the first - mentioned switch device and operable simultaneously with that switch device by the selection signal applied to the row address conductor. During the time when the display element is not being addressed, i.e. the output phase, this further switching device serves to isolate the input terminal from the column address conductor.

Preferably the first supply line is shared by all display elements in the same row or column. A respective supply line may be provided for each row or

column of display elements. Alternatively, a supply line could effectively be shared by all the display elements in the array using, for example, lines extending in the column or row direction and connected together at their ends or by using lines extending in both the column and the row directions and connected together in the form of a grid. The approach selected will depend on the technological details for a given design and fabrication process.

For simplicity, a first supply line which is associated, and shared by, a row of display elements may comprise the row address conductor associated with a different, preferably adjacent, row of display elements via which a selection signal is applied to the switch devices of the switching means of that different row.

The switch devices preferably also comprise transistors and all transistors may conveniently be formed as TFTs on a substrate of glass or other insulating material together with the address conductors using standard thin film deposition and patterning processes as used in the field of active matrix display devices and other large area electronic devices. It is envisaged however, that, the active matrix circuitry of the device may be fabricated using IC technology with a semiconductor substrate.

In order to prevent current flow through the display element during the sampling phase another switch device may be connected between the second current - carrying terminal of the drive transistor and the display element which is operable to isolate the display element from the drive transistor during the sampling phase. This switch device may similarly comprise a switching transistor but of opposite conductivity type to the transistors constituting the address conductor, it operates in complementary fashion. Thus, this transistor may comprise a p - channel device while the first - mentioned and further transistors comprise n - channel devices. Of course, by reversing the polarity of the display element and the polarity of the waveform applied to the row address conductors, the above transistor types can be reversed.

The need for such a complementary - operating switch device can be avoided. In a preferred embodiment a pulse signal is arranged to be applied to

the first supply line, and thus the first current - carrying electrode of the drive transistor, during the sampling phase which reverse biases the display element, thereby preventing current flow through the display element and ensuring that the drain current through the drive transistor corresponds to the input signal current and that the appropriate gate - source voltage is sampled on the capacitance. In the case of the first supply line comprising a row address conductor associated with an adjacent row of display elements, this pulse is provided separate to the selection signal on that row address conductor and coincident in time with the selection signal on the row address conductor associated with the display element concerned. The amplitude of the pulse required is less than that of the selection signal. Besides reducing the total number of transistors required, the avoidance of a switching transistor connected between the second current - carrying terminal of the driving transistor and the display element simplifies fabrication as the transistors then needed are all of the same polarity type.

Embodiments of active matrix electroluminescent display devices in accordance with the invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

20 Figure 1 is a simplified schematic diagram of part an embodiment of display device according to the invention;

Figure 2 shows in simple form the equivalent circuit of a typical pixel circuit comprising a display element and its associated control circuitry in the display device of Figure 1;

25 Figure 3 illustrates a practical realisation of the pixel circuit of Figure 2;

Figure 4 shows a modified form of the pixel circuit; and

Figure 5 shows another modified form of pixel circuit, together with associated drive waveforms for use therewith.

The figures are merely schematic and have not been drawn to scale.

30 The same reference numbers are used throughout the figures to denote the same or similar parts.

Referring to Figure 1, the active matrix addressed electroluminescent display device comprises a panel having a row and column matrix array of regularly-spaced pixels, denoted by the blocks 10 and comprising electroluminescent display elements together with associated switching means, located at the intersections between crossing sets of row (selection) and column (data) address conductors, or lines, 12 and 14. Only a few pixels are shown in the Figure for simplicity. In practice there may be several hundred rows and columns of pixels. The pixels 10 are addressed via the sets of row and column address conductors by a peripheral drive circuit comprising a row, scanning, driver circuit 16 and a column, data, driver circuit 18 connected to the ends of the respective sets of conductors.

Figure 2 shows in simplified schematic form the circuit of a typical pixel block 10 in the array and is intended to illustrate the basic manner of its operation. A practical implementation of the pixel circuit of Figure 2 is illustrated in Figure 3. The electroluminescent display element, referenced at 20, comprises an organic light emitting diode, represented here as a diode element (LED) and comprising a pair of electrodes between which one or more active layers of organic electroluminescent material is sandwiched. The display elements of the array are carried together with the associated active matrix circuitry on one side of an insulating support. Either the cathodes or the anodes of the display elements are formed of transparent conductive material. The support is of transparent material such as glass and the electrodes of the display elements 20 closest to the substrate may consist of a transparent conductive material such as ITO so that light generated by the electroluminescent layer is transmitted through these electrodes and the support so as to be visible to a viewer at the other side of the support. In this particular embodiment, however, the light output is intended to be viewed from above the panel and the display element anodes comprise parts of a continuous ITO layer 22 connected to a potential source and constituting a second supply line, common to all display elements in the array and held at a fixed reference potential. The cathodes of the display elements comprise a metal having a low work-function such as calcium or a magnesium : silver alloy. Typically, the

thickness of the organic electroluminescent material layer is between 100 nm and 200nm. Typical examples of suitable organic electroluminescent materials which can be used for the elements 20 are described in EPA-0 717446 to which reference is invited for further information and whose disclosure in this respect is incorporated herein. Electroluminescent materials such as conjugated polymer materials described in WO98/38959 can also be used.

Each display element 20 has an associated switch means which is connected to the row and column conductors 12 and 14 adjacent the display element and which is arranged to operate the display element in accordance with an applied analogue drive (data) signal level that determines the element's drive current, and hence light output (grey-scale). The display data signals are provided by the column driver circuit 18 which acts as a current source. A suitably processed video signal is supplied to this circuit which samples the video signal and applies a current constituting a data signal related to the video information to each of the column conductors in a manner appropriate to row at a time addressing of the array with the operations of the column driver circuit and the scanning row driver circuit being synchronised.

Referring to Figure 2, the switch means comprises a drive transistor 30, more particularly a n - channel FET, whose first current - carrying (source) terminal is connected to a supply line 31 and whose second current - carrying (drain) terminal is connected, via a switch 33, to the cathode of the display element 20. The anode of the display element is connected to a second supply line 34, which in effect is constituted by the continuous electrode layer held at a fixed reference potential. The gate of the transistor 30 is connected to the supply line 31, and hence the source electrode, via a storage capacitance 38 which may be a separately formed capacitor or the intrinsic gate - source capacitance of the transistor. The gate of the transistor 30 is also connected via a switch 32 to its drain terminal.

The transistor circuit operates in the manner of a single transistor current mirror with the same transistor performing both current sampling and current output functions and with the display element 20 acting as the load. An input to this current mirror circuit is provided by an input line 35 which connects to a

node 36 between the switches 32 and 33, constituting an input terminal, via a further switch 37 which controls the application of an input signal to the node.

Operation of the circuit takes place in two phases. In a first, sampling, phase, corresponding in time to an addressing period, an input signal for determining a required output from the display element is fed into the circuit and a consequential gate - source voltage on the transistor 30 is sampled and stored in the capacitance 38. In a subsequent, output, phase the transistor 30 operates to draw current through the display element 20 according to the level of the stored voltage so as to produce the required output from the display element, as determined by the input signal, which output is maintained for example until the display element is next addressed in a subsequent, new, sampling phase. During both phases it is assumed that the supply lines 31 and 34 are at appropriate, pre-set, potential levels, V1 and V2. The supply line 31 will normally be at ground potential (V1) and the supply line 34 will be at a positive potential (V2).

During the sampling phase, the switches 32 and 37 are closed, which diode - connects the transistor 30, and the switch 33 is open, which isolates the display element load. An input signal, corresponding to the required display element current and denoted here as I_{in} , is driven through the transistor 30 from an external source, e.g. the column driver circuit 18 in Figure 1, via the input line 35, the closed switch 37 and the input terminal 36. Because the transistor 30 is diode - connected by virtue of the closed switch 32, the voltage across the capacitance 38 at the steady state condition will be the gate - source voltage that is required to drive a current I_{in} through the channel of the transistor 30.

Having allowed sufficient time for this current to stabilise, the sampling phase is terminated upon the opening of the switches 32 and 37 isolating the input terminal 36 from the input line 35 and isolating the capacitance 38 so that the gate - source voltage, determined in accordance with the input signal I_{in} , is stored in the capacitance 38. The output phase then begins upon the closing of the switch 33 thus connecting the display element cathode to the drain of the transistor 30. The transistor 30 then operates as a current source and a current approximately equal to I_{in} is drawn through the display element 20. The drive

current for the display element may differ very slightly from the input current I_{in} because of capacitive coupling due to charge injection effects when switch 32 turns off causing a change in the voltage on capacitance 38 and also because the transistor 30 may not act as a perfect current source as in practice it is likely to have a finite output resistance. Because, however, the same transistor is used to sample I_{in} during the sampling phase and to generate the current during the output phase, the display element current is not dependent on the threshold voltage or the mobility of the transistor 30.

Figure 3 shows a practical embodiment of the pixel circuit of Figure 2 used in the display device of Figure 1. In this, the switches 32, 33 and 37 are each constituted by transistors and these switching transistors, together with the drive transistor 30, are all formed as thin film field effect transistors, TFTs. The input line 35, and the corresponding input lines of all pixel circuits in the same column, are connected to a column address conductor 14 and through this to the column driver circuit 18. The gates of the transistors 32, 33 and 37, and likewise the gates of the corresponding transistors in pixel circuits in the same row, are all connected to the same row address conductor 12. The transistors 32 and 37 comprise n - channel devices and are turned on (closed) by means of a selection (scan) signal in the form of a voltage pulse applied to the row address conductor 12 by the row driver circuit 16. The transistor 33 is of opposite conductivity type, comprising a p - channel device, and operates in complementary fashion to the transistors 32 and 37 so that it turns off (opens) when the transistors 32 and 37 are closed in response to a selection signal on the conductor 12, and vice versa.

The supply line 31 extends as an electrode parallel to the row conductor 12 and is shared by all pixel circuits in the same row. The supply lines 31 of all rows can be connected together at their ends. The supply lines may instead extend in the column direction with each line then being shared by the display elements in a respective column. Alternatively, supply lines may be provided extending in both the row and column directions and interconnected to form a grid structure.

The array is driven a row at a time in turn with a selection signal being

applied to each row conductor 12 in sequence. The duration of the selection signal determines a row address period, corresponding to the period of the aforementioned sampling phase. In synchronisation with the selection signal, appropriate input current drive signals, constituting data signals, are applied to the column conductors 14 by the column driver circuit 18 as required for a row at a time addressing so as to set all the display elements in a selected row to their required drive level simultaneously in a row address period with a respective input signal determining the required display outputs from the display elements. Following addressing of a row in this way, the next row of display elements is addressed in like manner. After all rows of display elements have been addressed in a field period the address sequence is repeated in subsequent field periods with the drive current for a given display element, and hence the output, being set in the respective row address period and maintained for a field period until the row of display elements concerned is next addressed.

The matrix structure of the array, comprising the TFTs, the sets of address lines, the storage capacitors (if provided as discrete components), the display element electrodes and their interconnections, is formed using standard thin film processing technology similar to that used in active matrix LCDs which basically involves the deposition and patterning of various thin film layers of conductive, insulating and semiconductive materials on the surface of an insulating support such as glass or plastics material by CVD deposition and photolithographic patterning techniques. An example of such is described in the aforementioned EP-A-0717446. The TFTs may comprise amorphous silicon or polycrystalline silicon TFTs. The organic electroluminescent material layer of the display elements may be formed by vapour deposition or by another suitable known technique, such as spin coating.

The pixel circuit of Figure 3 requires the use of both n and p channel transistors which can complicate the fabrication process. Moreover, this particular circuit requires four transistors and a common electrode whose provision may reduce the effective aperture of the pixel.

Figure 4 illustrates an alternative, modified, form of pixel circuit which avoids the need to use an opposite polarity type transistor. In this circuit the

transistor 33 is removed and the input terminal 38 is connected directly to the display element 20. As with the previous circuit there are two phases, sampling and output, in the operation of the current mirror. During the sampling phase, the switching transistors 32 and 37 are closed, through a selection pulse on the associated row conductor 12, which diode - connects the transistor 30. At the same time the supply line 31 is supplied with a positive voltage pulse, rather than remaining at a constant reference potential as before, so that the display element 20 is reverse - biased. In this state, no current can flow through the display element 20 (ignoring small reverse leakage currents) and the drain current of the transistor 30 is equal to the input current I_{in} . In this way, the appropriate gate - source voltage of the transistor 30 is again sampled on the capacitance 38. At the end of the sampling phase, the switching transistors 32 and 37 are turned off (opened) as before and the supply line 31 is returned to its normal level, typically OV. In the subsequent, output, phase, the transistor 30 operates as before as a current source drawing current through the display element at a level determined by the voltage stored on the capacitor 38.

In the embodiment of Figure 4, a supply line 31 connected separately to a potential source may be provided for each row of pixels. During a sampling phase the display elements in the row being addressed are turned off (as a result of pulsing the supply line 31) and if there is effectively only one common supply line in the array which is common to all pixel circuits, i.e. the supply line 31 of one row is part of a continuous line interconnecting all rows of pixel circuits, then all the display elements would be turned off during each sampling phase irrespective of which row is being addressed. This would reduce the duty cycle (the ratio of ON to OFF times) for a display element. Thus, it may be desirable for the supply line 31 associated with a row to be kept separate from the supply lines associated with other rows.

Another alternative form of pixel circuit which reduces the overall number of lines in the row direction is shown schematically in Figure 5, together with typical drive waveforms employed in this embodiment. The pixel circuit depicted is one in the Nth row of the array and in this arrangement the source of the transistor 30 and the side of the capacitance 38 remote from the gate are both

connected to the next, adjacent, row conductor 14 associated with the (N+1)th row of pixels rather than to a separate, dedicated, supply line 31. Operation of this pixel circuit is basically the same as previously described. The required row drive waveforms applied to the Nth and (N+1)th row conductors 12 (and all other row conductors) differ from those in the previous embodiments. In addition to comprising a low, hold, level V_h which holds the transistors 32 and 37 of the pixel circuits connected thereto in their off (open) state and a selection (gating) pulse V_s which turns those transistors on (closed) and defines a respective row address period (sampling phase), T_r , the waveform applied to each row conductor further includes an intermediate level pulse arranged to reverse bias the display element in similar manner to the pulsing of the supply line 31 in the Figure 4 embodiment. In Figure 5, $V_s(N)$ denotes the selection pulse applied to the Nth row conductor to operate the transistors 32 and 37 of the pixel circuits in that row and $V_s(N+1)$ denotes the selection signal applied to the next, (N+1)th row conductor which, because the rows are addressed in sequence, occurs after the signal $V_s(N)$. The waveform for each row conductor includes a positive pulse, V_r , which precedes the selection signal and is coincident in time with the selection signal applied to the preceding row conductor 12 so that when the pixel circuits in the preceding row, i.e. the Nth row, are addressed upon the application thereto of $V_s(N)$ the positive pulse V_r appearing on the (N+1)th row conductor serves to reverse bias the display elements in the pixel circuits in row N during their sampling phase. The level of V_r is selected so as to provide the desired reverse biasing while being lower than the selection signal V_s so as to ensure that the transistors 32 of 37 and the pixels circuits in the next, (N+1)th row are not turned on.

With regard to all the above-described embodiments, it will be appreciated that although the pixel circuits are based on an n-channel transistor 30, the same modes of operation are possible if the polarity of these transistors is reversed, the display element polarity is reversed, and the polarity of the pulses applied to the supply lines 31 row conductors 12 when used are reversed. Where p-type transistors 33 are used, these would become n-type.

There may be technological reasons for preferring one or other

15

orientation of the diode display elements so that a display device using p-channel transistors is desirable. For example, the material required for the cathode of a display element using organic electroluminescent material would normally have a low work function and typically would comprise a magnesium-based alloy or calcium. Such materials tend to be difficult to pattern photolithographically and hence a continuous layer of such material common to all display elements in the array may be preferred.

It is envisaged that instead of using thin film technology to form the TFTs and capacitors on an insulating substrate, the active matrix circuitry could be fabricated using IC technology on a semiconductor, for example, silicon, substrate. The upper electrodes of the LED display elements provided on this substrate would then be formed of transparent conductive material, e.g. ITO, with the light output of the elements being viewed through these upper electrodes.

It is envisaged also that the switches 32, 33 and 37 need not comprise transistors but may comprise other types of switches, for example, micro-relays or micro-switches.

Although the above embodiments have been described with reference to organic electroluminescent display elements in particular, it will be appreciated that other kinds of electroluminescent display elements comprising electroluminescent material through which current is passed to generate light output may be used instead.

The display device may be a monochrome or multi-colour display device. It will be appreciated that a colour display device may be provided by using different light colour emitting display elements in the array. The different colour emitting display elements may typically be provided in a regular, repeating pattern of, for example, red, green and blue colour light emitting display elements.

In summary, an active matrix electroluminescent display device has an array of current - driven electroluminescent display elements, for example comprising organic electroluminescent material, whose operations are each controlled by an associated switching means to which a drive signal for

16

determining a desired light output is supplied in a respective address period and which is arranged to drive the display element according to the drive signal following the address period. Each switching means comprises a current mirror circuit in which the same transistor is used to both sense and produce the required drive current for the display element with the gate of the transistor being connected to a storage capacitance on which a voltage determined by the drive signal is stored. This allows variations in transistor characteristics over the array to be compensated and improved uniformity of light outputs from the display elements to be obtained.

From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the field of matrix electroluminescent displays and component parts thereof and which may be used instead of or in addition to features already described herein.

CLAIMS

1. An active matrix electroluminescent display device comprising a
 5 matrix array of electroluminescent display elements each of which has an
 associated switching means for controlling the current through the display
 element in accordance with an applied drive signal and in which the switch
 means comprises a drive transistor whose first current - carrying terminal is
 10 connected to a first supply line, whose second current - carrying terminal is
 connected via the display element to a second supply line and whose gate is
 connected to its first current - carrying terminal via a capacitance, characterised
 in that the second current - carrying terminal of the drive transistor is connected
 to an input terminal for the drive signal and in that a switch device is connected
 15 between the second current - carrying terminal and the gate of the transistor
 which is operable during the application of a drive signal so as to store a gate
 voltage on the capacitance determined by the drive signal.

2. An active matrix electroluminescent display device according to
 Claim 1, characterised in that the display elements are arranged in rows and
 20 columns, and the switch devices of the switching means for a row of display
 elements are connected to a respective, common, row address conductor via
 which a selection signal for operating the switch devices in that row is supplied,
 and each row address conductor is arranged to receive a selection signal in
 turn, whereby the rows of display elements are addressed one at a time in
 25 sequence.

3. An active matrix electroluminescent display device according to
 Claim 2, characterised in that the drive signals for the display elements in a
 column are supplied via a respective column address conductor common to the
 30 display elements in the column, there being a further switch device connected
 between the input terminal of the switching means of a display element and its
 associated column address conductor which is operable to transfer a drive

signal on the column address conductor to the input terminal when the first -
 mentioned switch device is closed.

4. An active matrix electroluminescent display device according to
 Claim 3, characterised in that the further switch device is connected to the same
 5 row address conductor as the first - mentioned switch device and operable
 simultaneously with that switch device by a selection signal applied to the row
 address conductor.

5. An active matrix electroluminescent display device according to
 any one of Claims 2 to 4, characterised in that the first supply line is shared by
 10 all the display elements in the same row or column with a respective supply line
 being provided for each row or column of display elements.

6. An active matrix electroluminescent display device according to
 Claim 5, characterised in that the first supply line is associated with, and shared
 15 by, a row of display elements and comprises the row address conductor
 associated with a different row of display elements via which a selection signal
 is applied to the switch devices of the switching means of that different row.

7. An active matrix electroluminescent display device according to
 any one of the preceding claims, characterised in that a switch device is
 20 connected between the second current - carrying terminal of the drive transistor
 and the display element which is operable to isolate the display element from
 the drive transistor when the switch device connected between that terminal and
 25 the gate of the drive transistor is closed.

8. An active matrix electroluminescent display device according to
 any one of Claims 1 to 6, characterised in that the first supply line is arranged to
 30 receive a pulse signal during the application of a drive signal such as to reverse
 bias the display element.

9. An active matrix electroluminescent display device according to any one of the preceding claims, characterised in that drive transistors and the switch devices comprise thin film transistors carried on an insulating substrate.

1/3

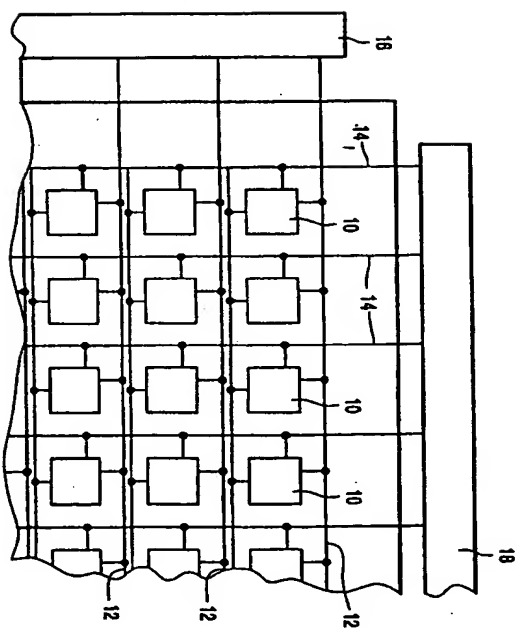


FIG. 1

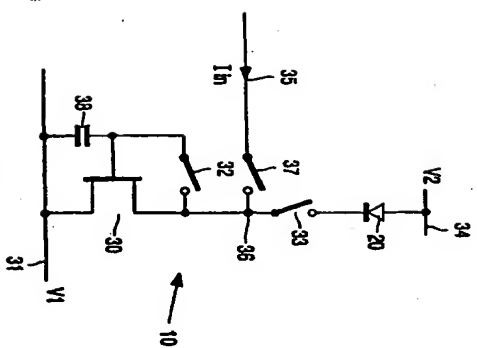


FIG. 2

2/3

3/3

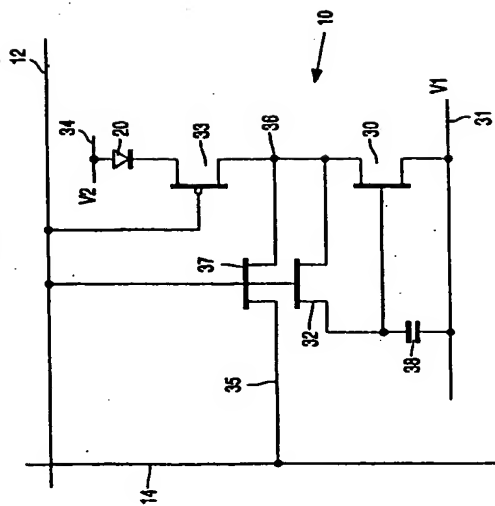


FIG. 3

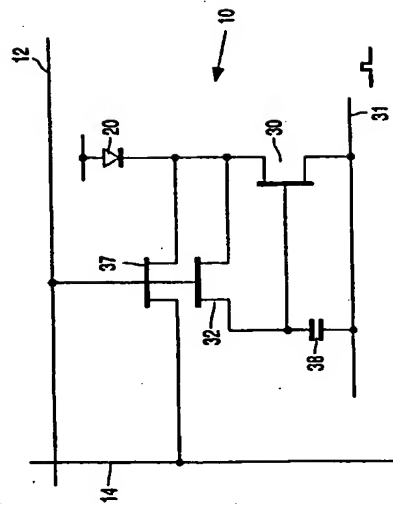


FIG. 4

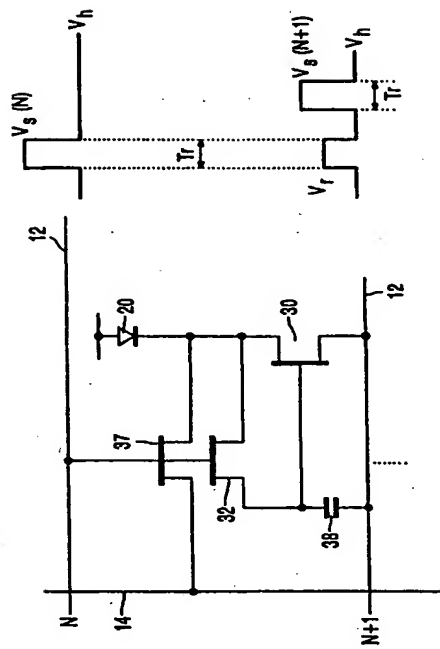


FIG. 5

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

International Patent Classification 6:

G09G 3/20, G09F 9/33

A2

(11) International Publication Number: WO 99/65011
(43) International Publication Date: 16 December 1999 (16.12.99)

(31) International Application Number: PCT/US99/01041

(32) International Filing Date: 7 June 1999 (07.06.99)

(30) Priority Data: 9812742.6 12 June 1998 (12.06.98) GB

(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V.
(Netherlands), Groeneveldweg 1, NL-5621 BA Eindhoven (NL)

(72) Inventors: KNAPP, Alan, G.; Prof. Hoshida 6, NL-5656 AA Eindhoven (NL); BIRD, Neil, C.; Prof. Hoshida 6, NL-5656 AA Eindhoven (NL)

(73) Applicant (for SE only): PHILIPS AB (Sweden), Karlavagnan 7, Kista, S-164 83 Stockholm (SE)


(74) Agent: WILLIAMSON, Paul, L.; Prof. Hoshida 6, NL-5656 AA Eindhoven (NL)

(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE),
Without international search report and to be republished upon receipt of that report.

(54) Title: ACTIVE MATRIX ELECTROLUMINESCENT DISPLAY DEVICES

(57) Abstract

An active matrix electroluminescent display device has an array of current-driven electroluminescent display elements (10), for example comprising organic electroluminescent material, whose operations are each controlled by an associated switching means (10) in which a drive signal for determining a desired light output is supplied to a respective address period and which is arranged to drive the display element according to the drive signal following the address period. Each switching means comprises a current mirror circuit (30, 32, 33) in which the same transistors (30) is used to both sense and produce the required drive current for the display element (20) with the gate of the transistor being connected to a storage capacitance (30) on which a voltage determined by the drive signal is stored. This allows variations in transistor characteristics over the array to be compensated and improved uniformity of light outputs from the display elements to be obtained.

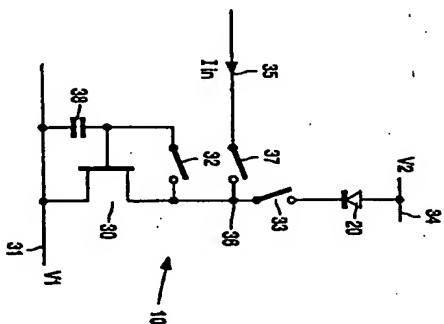

43 2002-517806 87 70

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	SI	Slovenia
AM	Armenia	FI	Finland	SK	Slovakia
AT	Austria	FR	France	SN	Senegal
AU	Australia	GB	United Kingdom	SO	Switzerland
AX	Azores and Madeira	GR	Greece	TD	Togo
BA	Bosnia and Herzegovina	GT	Guatemala	TI	Tajikistan
BB	Barbados	HN	Honduras	TM	Turkmenistan
BE	Belgium	IE	Ireland	TR	Turkey
BF	Burkina Faso	IL	Israel	UA	Ukraine
BG	Bulgaria	IS	Iceland	UG	Uganda
BI	Benin	IT	Italy	US	United States of America
BJ	Benin	JP	Japan	UZ	Uzbekistan
BM	Bermuda	KE	Kenya	VE	Venezuela
BN	Brunei	KG	Kyrgyzstan	VN	Viet Nam
BO	Bolivia	KH	Kampuchea	VU	Vanuatu
BR	Brazil	KR	Republic of Korea	WU	Wales
BS	Bahamas	KZ	Kazakhstan	ZA	South Africa
BT	Bhutan	LA	Laos		
BV	Bouvet	LI	Liechtenstein		
CA	Canada	LU	Luxembourg		
CC	Cocos (Keeling) Islands	LV	Latvia		
CF	Cote d'Ivoire	MC	Monaco		
CG	Congo	MD	Moldova		
CH	Switzerland	ME	Montenegro		
CI	Cote d'Ivoire	MG	Madagascar		
CM	Cameroun	MH	Marshall Islands		
CN	China	ML	Mali		
CO	Colombia	MN	Mongolia		
CU	Cuba	MR	Morocco		
CZ	Czech Republic	MT	Malta		
DE	Germany	MX	Mexico		
DK	Denmark	MY	Malaysia		
EE	Estonia	NB	New Brunswick		
		NC	New Caledonia		
		NE	Niger		
		NG	Nigeria		
		NI	Nicaragua		
		NL	Netherlands		
		NO	Norway		
		NZ	New Zealand		
		OM	Oman		
		PA	Panama		
		PE	Peru		
		PL	Poland		
		PT	Portugal		
		RO	Romania		
		RU	Russian Federation		
		SA	Saudi Arabia		
		SE	Sweden		
		SG	Singapore		

DESCRIPTION

ACTIVE MATRIX ELECTROLUMINESCENT DISPLAY DEVICES

5

This invention relates to active matrix electroluminescent display devices comprising a matrix array of electroluminescent display elements each of which has an associated switching means for controlling the current through the display element, in accordance with an applied drive signal.

10

Matrix display devices employing electroluminescent, light-emitting, display elements are well known. As for the display elements organic thin film electroluminescent elements and light-emitting diodes (LEDs), comprising traditional III-V semiconductor compounds, have been used. In the main, such display devices have been of the passive type in which the electroluminescent display elements are connected between intersecting sets of row and column address lines and addressed in multiplexed fashion. Recent developments in (organic) polymer electroluminescent materials have demonstrated their ability to be used practically for video display purposes and the like.

20

Electroluminescent elements using such materials typically comprise one or more layers of a semiconducting conjugated polymer sandwiched between a pair of (anode and cathode) electrodes, one of which is transparent and the other of which is of a material suitable for injecting holes or electrons into the polymer layer. An example of such is described in an article by D. Braun and A. J. Heeger in Applied Physics Letters 58 (18) p.p. 1982-1984 (6th May 1991). By suitable choice of the conjugated polymer chain and side chains, it is possible to adjust the bandgap, electron affinity and the ionisation potential of the polymer. An active layer of such a material can be fabricated using a CVD process or simply by a spin-coating technique using a solution of a soluble conjugated polymer. Through these processes, LEDs and displays with large light-emitting surfaces can be produced.

30

Organic electroluminescent materials offer advantages in that they are very

efficient and require relatively low (DC) drive voltages. Moreover, in contrast to conventional LCDs, no backlight is required. In a simple matrix display device, the material is provided between sets of row and column address conductors at their intersections thereby forming a row and column array of electroluminescent display elements. By virtue of the diode-like I-V characteristic of the organic electroluminescent display elements, each element is capable of providing both a display and a switching function enabling multiplexed drive operation.

5

However, when driving this simple matrix arrangement on a conventional row at a time scanning basis each display element is driven to emit light for only a small fraction of the overall field time, corresponding to a row address period. In the case of an array having N rows for example, each display element can emit light for a period equal to t/N at most where t is the field period. In order then to obtain a desired mean brightness from the display, it is necessary that the peak brightness produced by each element must be at least N times the required mean brightness and the peak display element current will be at least N times the mean current. The resulting high peak currents cause problems, notably with the more rapid degradation of the display element lifetime and with voltage drops caused along the row address conductors.

10

One solution to these problems is to incorporate the display elements into an active matrix whereby each display element has an associated switch means which is operable to supply a drive current to the display element so as to maintain its light output for a significantly longer period than the row address period. Thus, for example, each display element circuit is loaded with an analogue (display data) drive signal once per field period in a respective row address period which drive signal is stored and is effective to maintain a required drive current through the display element for a field period until the row of display elements concerned is next addressed. This reduces the peak brightness and the peak current required by each display element by a factor of approximately N for a display with N rows. An example of such an active matrix addressed electroluminescent display device is described in EP-A-0717446.

15

The conventional kind of active matrix circuitry used in LCDs cannot be used with electroluminescent display elements as such display elements need to

One solution to these problems is to incorporate the display elements into an active matrix whereby each display element has an associated switch means which is operable to supply a drive current to the display element so as to maintain its light output for a significantly longer period than the row address period. Thus, for example, each display element circuit is loaded with an analogue (display data) drive signal once per field period in a respective row address period which drive signal is stored and is effective to maintain a required drive current through the display element for a field period until the row of display elements concerned is next addressed. This reduces the peak brightness and the peak current required by each display element by a factor of approximately N for a display with N rows. An example of such an active matrix addressed electroluminescent display device is described in EP-A-0717446.

20

The conventional kind of active matrix circuitry used in LCDs cannot be used with electroluminescent display elements as such display elements need to

25

The conventional kind of active matrix circuitry used in LCDs cannot be used with electroluminescent display elements as such display elements need to

30

The conventional kind of active matrix circuitry used in LCDs cannot be used with electroluminescent display elements as such display elements need to

continuously pass current in order to generate light whereas the LC display elements are capacitive and therefore take virtually no current and allow the drive signal voltage to be stored in the capacitance for the whole field period. In the aforementioned publication, each switch means comprises two TFTs (thin film transistors) and a storage capacitor. The anode of the display element is connected to the drain of the second TFT and the first TFT is connected to the gate of the second TFT which is connected also to one side of the capacitor. During a row address period, the first TFT is turned on by means of a row selection (gating) signal and a drive (data) signal is transferred via this TFT to the capacitor. After the removal of the selection signal the first TFT turns off and the voltage stored on the capacitor, constituting a gate voltage for the second TFT, is responsible for operation of the second TFT which is arranged to deliver electrical current to the display element. The gate of the first TFT is connected to a gate line (row conductor) common to all display elements in the same row and the source of the first TFT is connected to a source line (column conductor) common to all display elements in the same column. The drain and source electrodes of the second TFT are connected to the anode of the display element and a ground line which extends parallel to the source line and is common to all display elements in the same column. The other side of the capacitor is also connected to this ground line. The active matrix structure is fabricated on a suitable transparent, insulating, support, for example of glass, using thin film deposition and process technology similar to that used in the manufacture of AMLCDs.

With this arrangement, the drive current for the light-emitting diode display element is determined by a voltage applied to the gate of the second TFT. This current therefore depends strongly on the characteristics of that TFT. Variations in threshold voltage, mobility and dimensions of the TFT will produce unwanted variations in the display element current, and hence its light output. Such variations in the second TFTs associated with display elements over the area of the array, or between different arrays, due, for example, to manufacturing processes, lead to non-uniformity of light outputs from the display elements.

It is an object of the present invention to provide an improved active matrix electroluminescent display device.

It is another object of the present invention to provide a display element circuit for an active matrix electroluminescent display device which reduces the effect of variations in the transistor characteristics on the light output of the display elements and hence improves the uniformity of the display.

This objective is achieved in the present invention by using a current mirror circuit for the switching means in which the same transistor is used to both sense and later produce the required drive current for the display element. This allows all variations in transistor characteristics to be compensated.

According to the present invention, there is provided an active matrix electroluminescent display device of the kind described in the opening paragraph, in which the switching means comprises a drive transistor whose first current - carrying terminal is connected to a first supply line, whose second current - carrying terminal is connected via the display element to a second supply line and whose gate is connected to its first current - carrying terminal via a capacitance, which is characterised in that the second current - carrying terminal of the drive transistor is connected to an input terminal for the drive signal and in that a switch device is connected between the second current - carrying terminal and the gate of the transistor which is operable during the application of a drive signal so as to store on the capacitance a gate voltage determined by the drive signal.

The arrangement of the switching means is such that it operates effectively in the manner of a single transistor current mirror circuit wherein the same transistor performs current sampling and current output functions. When the switch device is closed the transistor is diode connected and the input drive signal determines a current flow through the transistor and a consequential gate voltage which is stored on the capacitance. After the switch device opens, the transistor acts as a current source for the display element with the gate voltage determining the current level through the display element, and hence its brightness, which level is thereafter maintained, according to the set value, for

example until the display element is next addressed. Thus, in a first operating phase, in effect a display element addressing period, an input current is sampled and the transistor gate voltage set accordingly and in a subsequent output phase the transistor operates to draw a current through the display element corresponding to the sampled current. Because in this arrangement the same transistor is used both to sample the input current during the sampling phase and to generate the drive current for the display element during the output phase the display element current is not dependent on the threshold voltage, the mobility, or the exact geometry of the transistor. The aforementioned problems of non-uniformity of light outputs from the display elements over the array is thus overcome.

Preferably, the display elements are arranged in rows and columns, and the switch devices of the switching means for a row of display elements are connected to a respective, common, row address conductor via which a selection (scan) signal for operating the switch devices in that row is supplied, and each row address conductor is arranged to receive a selection signal in turn, whereby the rows of display elements are addressed one at a time in sequence. The drive signals (display data) for the display elements in a column are preferably supplied via a respective column address conductor common to the display elements in the column, there being a further switch device connected between the input terminal of the switching means of a display element and its associated column address conductor which is operable to transfer a drive signal on the column address conductor to the input terminal when the first - mentioned switch device is closed. To this end, the further switch device is preferably connected to the same row address conductor as the first - mentioned switch device and operable simultaneously with that switch device by the selection signal applied to the row address conductor. During the time when the display element is not being addressed, i.e. the output phase, this further switching device serves to isolate the input terminal from the column address conductor.

Preferably the first supply line is shared by all display elements in the same row or column. A respective supply line may be provided for each row or

column of display elements. Alternatively, a supply line could effectively be shared by all the display elements in the array using, for example, lines extending in the column or row direction and connected together at their ends or by using lines extending in both the column and the row directions and connected together in the form of a grid. The approach selected will depend on the technological details for a given design and fabrication process.

For simplicity, a first supply line which is associated, and shared by, a row of display elements may comprise the row address conductor associated with a different, preferably adjacent, row of display elements via which a selection signal is applied to the switch devices of the switching means of that different row.

The switch devices preferably also comprise transistors and all transistors may conveniently be formed as TFTs on a substrate of glass or other insulating material together with the address conductors using standard thin film deposition and patterning processes as used in the field of active matrix display devices and other large area electronic devices. It is envisaged however, that, the active matrix circuitry of the device may be fabricated using IC technology with a semiconductor substrate.

In order to prevent current flow through the display element during the sampling phase another switch device may be connected between the second current - carrying terminal of the drive transistor and the display element which is operable to isolate the display element from the drive transistor during the sampling phase. This switch device may similarly comprise a switching transistor but of opposite conductivity type to the transistors constituting the other switching devices so that, with its gate connected to the same row address conductor, it operates in complementary fashion. Thus, this transistor may comprise a p - channel device while the first - mentioned and further transistors comprise n - channel devices. Of course, by reversing the polarity of the display element and the polarity of the waveform applied to the row address conductors, the above transistor types can be reversed.

The need for such a complementary - operating switch device can be avoided. In a preferred embodiment a pulse signal is arranged to be applied to

the first supply line, and thus the first current - carrying electrode of the drive transistor, during the sampling phase which reverse biases the display element, thereby preventing current flow through the display element and ensuring that the drain current through the drive transistor corresponds to the input signal current and that the appropriate gate - source voltage is sampled on the capacitance. In the case of the first supply line comprising a row address conductor associated with an adjacent row of display elements, this pulse is provided separate to the selection signal on that row address conductor and coincident in time with the selection signal on the row address conductor associated with the display element concerned. The amplitude of the pulse required is less than that of the selection signal. Besides reducing the total number of transistors required, the avoidance of a switching transistor connected between the second current - carrying terminal of the driving transistor and the display element simplifies fabrication as the transistors then needed are all of the same polarity type.

Embodiments of active matrix electroluminescent display devices in accordance with the invention will now be described, by way of example, with reference to the accompanying drawings, in which:-

Figure 1 is a simplified schematic diagram of part an embodiment of display device according to the invention;

Figure 2 shows in simple form the equivalent circuit of a typical pixel circuit comprising a display element and its associated control circuitry in the display device of Figure 1;

Figure 3 illustrates a practical realisation of the pixel circuit of Figure 2;

Figure 4 shows a modified form of the pixel circuit; and

Figure 5 shows another modified form of pixel circuit, together with associated drive waveforms for use therewith.

The figures are merely schematic and have not been drawn to scale. The same reference numbers are used throughout the figures to denote the same or similar parts.

Referring to Figure 1, the active matrix addressed electroluminescent display device comprises a panel having a row and column matrix array of regularly-spaced pixels, denoted by the blocks 10 and comprising electroluminescent display elements together with associated switching means, located at the intersections between crossing sets of row (selection) and column (data) address conductors, or lines, 12 and 14. Only a few pixels are shown in the Figure for simplicity. In practice there may be several hundred rows and columns of pixels. The pixels 10 are addressed via the sets of row and column address conductors by a peripheral drive circuit comprising a row, scanning, driver circuit 16 and a column, data, driver circuit 18 connected to the ends of the respective sets of conductors.

Figure 2 shows in simplified schematic form the circuit of a typical pixel block 10 in the array and is intended to illustrate the basic manner of its operation. A practical implementation of the pixel circuit of Figure 2 is illustrated in Figure 3. The electroluminescent display element, referenced at 20, comprises an organic light emitting diode, represented here as a diode element (LED) and comprising a pair of electrodes between which one or more active layers of organic electroluminescent material is sandwiched. The display elements of the array are carried together with the associated active matrix elements on one side of an insulating support. Either the cathodes or the anodes of the display elements are formed of transparent conductive material. The support is of transparent material such as glass and the electrodes of the display elements 20 closest to the substrate may consist of a transparent conductive material such as ITO so that light generated by the electroluminescent layer is transmitted through these electrodes and the support so as to be visible to a viewer at the other side of the support. In this particular embodiment, however, the light output is intended to be viewed from above the panel and the display element anodes comprise parts of a continuous ITO layer 22 connected to a potential source and constituting a second supply line common to all display elements in the array and held at a fixed reference potential. The cathodes of the display elements comprise a metal having a low work-function such as calcium or a magnesium : silver alloy. Typically, the

thickness of the organic electroluminescent material layer is between 100 nm and 200nm. Typical examples of suitable organic electroluminescent materials which can be used for the elements 20 are described in EPA-0 717446 to which reference is invited for further information and whose disclosure in this respect is incorporated herein. Electroluminescent materials such as conjugated polymer materials described in WO98/36959 can also be used.

Each display element 20 has an associated switch means which is connected to the row and column conductors 12 and 14 adjacent the display element and which is arranged to operate the display element in accordance with an applied analogue drive (data) signal level that determines the element's drive current, and hence light output (grey-scale). The display data signals are provided by the column driver circuit 18 which acts as a current source. A suitably processed video signal is supplied to this circuit which samples the video signal and applies a current constituting a data signal related to the video information to each of the column conductors in a manner appropriate to row at a time addressing of the array with the operations of the column driver circuit and the scanning row driver circuit being synchronised.

Referring to Figure 2, the switch means comprises a drive transistor 30, more particularly a n - channel FET, whose first current - carrying (source) terminal is connected to a supply line 31 and whose second current - carrying (drain) terminal is connected, via a switch 33, to the cathode of the display element 20. The anode of the display element is connected to a second supply line 34, which in effect is constituted by the continuous electrode layer held at a fixed reference potential. The gate of the transistor 30 is connected to the supply line 31, and hence the source electrode, via a storage capacitance 38 which may be a separately formed capacitor or the intrinsic gate - source capacitance of the transistor. The gate of the transistor 30 is also connected via a switch 32 to its drain terminal.

The transistor circuit operates in the manner of a single transistor current mirror with the same transistor performing both current sampling and current output functions and with the display element 20 acting as the load. An input to this current mirror circuit is provided by an input line 35 which connects to a

node 38 between the switches 32 and 33, constituting an input terminal, via a further switch 37 which controls the application of an input signal to the node.

Operation of the circuit takes place in two phases. In a first, sampling phase, corresponding in time to an addressing period, an input signal for determining a required output from the display element is fed into the circuit and a consequential gate - source voltage on the transistor 30 is sampled and stored in the capacitance 38. In a subsequent, output, phase the transistor 30 operates to draw current through the display element 20 according to the level of the stored voltage so as to produce the required output from the display element, as determined by the input signal, which output is maintained for example until the display element is next addressed in a subsequent, new, sampling phase. During both phases it is assumed that the supply lines 31 and 34 are at appropriate, pre-set, potential levels, V1 and V2. The supply line 31 will normally be at ground potential (V1) and the supply line 34 will be at a positive potential (V2).

During the sampling phase, the switches 32 and 37 are closed, which diode - connects the transistor 30, and the switch 33 is open, which isolates the display element load. An input signal, corresponding to the required display element current and denoted here as *lin*, is driven through the transistor 30 from an external source, e.g. the column driver circuit 18 in Figure 1, via the input line 35, the closed switch 37 and the input terminal 36. Because the transistor 30 is diode - connected by virtue of the closed switch 32, the voltage across the capacitance 38 at the steady state condition will be the gate - source voltage that is required to drive a current *lin* through the channel of the transistor 30.

Having allowed sufficient time for this current to stabilise, the sampling phase is terminated upon the opening of the switches 32 and 37 isolating the input terminal 36 from the input line 35 and isolating the capacitance 38 so that the gate - source voltage, determined in accordance with the input signal *lin*, is stored in the capacitance 38. The output phase then begins upon the closing of the switch 33 thus connecting the display element cathode to the drain of the transistor 30. The transistor 30 then operates as a current source and a current approximately equal to *lin* is drawn through the display element 20. The drive

11

current for the display element may differ very slightly from the input current I_{in} because of capacitive coupling due to charge injection effects when switch 32 turns off causing a change in the voltage on capacitance 38 and also because the transistor 30 may not act as a perfect current source as in practice it is likely to have a finite output resistance. Because, however, the same transistor is used to sample I_{in} during the sampling phase and to generate the current during the output phase, the display element current is not dependent on the threshold voltage or the mobility of the transistor 30.

Figure 3 shows a practical embodiment of the pixel circuit of Figure 2 used in the display device of Figure 1. In this, the switches 32, 33 and 37 are each constituted by transistors and these switching transistors, together with the drive transistor 30, are all formed as thin film field effect transistors, TFTs. The input line 35, and the corresponding input lines of all pixel circuits in the same column, are connected to a column address conductor 14 and through this to the column driver circuit 18. The gates of the transistors 32, 33 and 37, and likewise the gates of the corresponding transistors in pixel circuits in the same row, are all connected to the same row address conductor 12. The transistors 32 and 37 comprise n - channel devices and are turned on (closed) by means of a selection (scan) signal in the form of a voltage pulse applied to the row address conductor 12 by the row driver circuit 16. The transistor 33 is of opposite conductivity type, comprising a p - channel device, and operates in complementary fashion to the transistors 32 and 37 so that it turns off (opens) when the transistors 32 and 37 are closed in response to a selection signal on the conductor 12, and vice versa.

The supply line 31 extends as an electrode parallel to the row conductor 12 and is shared by all pixel circuits in the same row. The supply lines 31 of all rows can be connected together at their ends. The supply lines may instead extend in the column direction with each line then being shared by the display elements in a respective column. Alternatively, supply lines may be provided extending in both the row and column directions and interconnected to form a grid structure.

The array is driven a row at a time in turn with a selection signal being

12

applied to each row conductor 12 in sequence. The duration of the selection signal determines a row address period, corresponding to the period of the aforementioned sampling phase. In synchronisation with the selection signal, appropriate input current drive signals, constituting data signals, are applied to the column conductors 14 by the column driver circuit 18 as required for a row at a time addressing so as to set all the display elements in a selected row to their required drive level simultaneously in a row address period with a respective input signals determining the required display outputs from the display elements. Following addressing of a row in this way, the next row of display elements is addressed in like manner. After all rows of display elements have been addressed in a field period the address sequence is repeated in subsequent field periods with the drive current for a given display element, and hence the output, being set in the respective row address period and maintained for a field period until the row of display elements concerned is next addressed.

The matrix structure of the array, comprising the TFTs, the sets of address lines, the storage capacitors (if provided as discrete components), the display element electrodes and their interconnections, is formed using standard thin film processing technology similar to that used in active matrix LCDs which basically involves the deposition and patterning of various thin film layers of conductive, insulating and semiconductive materials on the surface of an insulating support such as glass or plastics material by CVD deposition and photolithographic patterning techniques. An example of such is described in the aforementioned EP-A-0717446. The TFTs may comprise amorphous silicon or polycrystalline silicon TFTs. The organic electroluminescent material layer of the display elements may be formed by vapour deposition or by another suitable known technique, such as spin coating.

The pixel circuit of Figure 3 requires the use of both n and p channel transistors which can complicate the fabrication process. Moreover, this particular circuit requires four transistors and a common electrode whose provision may reduce the effective aperture of the pixel.

Figure 4 illustrates an alternative, modified, form of pixel circuit which avoids the need to use an opposite polarity type transistor. In this circuit the

transistor 33 is removed and the input terminal 36 is connected directly to the display element 20. As with the previous circuit there are two phases, sampling and output, in the operation of the current mirror. During the sampling phase, the switching transistors 32 and 37 are closed, through a selection pulse on the associated row conductor 12, which diode - connects the transistor 30. At the same time the supply line 31 is supplied with a positive voltage pulse, rather than remaining at a constant reference potential as before, so that the display element 20 is reverse - biased. In this state, no current can flow through the display element 20 (ignoring small reverse leakage currents) and the drain current of the transistor 30 is equal to the input current I_{in} . In this way, the appropriate gate - source voltage of the transistor 30 is again sampled on the capacitance 38. At the end of the sampling phase, the switching transistors 32 and 37 are turned off (opened) as before and the supply line 31 is returned to its normal level, typically OV. In the subsequent, output, phase, the transistor 30 operates as before as a current source drawing current through the display element at a level determined by the voltage stored on the capacitor 38.

In the embodiment of Figure 4, a supply line 31 connected separately to a potential source may be provided for each row of pixels. During a sampling phase the display elements in the row being addressed are turned off (as a result of pulsing the supply line 31) and if there is effectively only one common supply line in the array which is common to all pixel circuits, i.e. the supply line 31 of one row is part of a continuous line interconnecting all rows of pixel circuits, then all the display elements would be turned off during each sampling phase irrespective of which row is being addressed. This would reduce the duty cycle (the ratio of ON to OFF times) for a display element. Thus, it may be desirable for the supply line 31 associated with a row to be kept separate from the supply lines associated with other rows.

Another alternative form of pixel circuit which reduces the overall number of lines in the row direction is shown schematically in Figure 5, together with typical drive waveforms employed in this embodiment. The pixel circuit depicted is one in the Nth row of the array and in this arrangement the source of the transistor 30 and the side of the capacitance 38 remote from the gate are both

connected to the next, adjacent, row conductor 14 associated with the (N+1)th row of pixels rather than to a separate, dedicated, supply line 31. Operation of this pixel circuit is basically the same as previously described. The required row drive waveforms applied to the Nth and (N+1)th row conductors 12 (and all other row conductors) differ from those in the previous embodiments. In addition to comprising a low, hold, level V_h which holds the transistors 32 and 37 of the pixel circuits connected thereto in their off (open) state and a selection (gating) pulse V_s which turns those transistors on (closed) and defines a respective row address period (sampling phase), T_r , the waveform applied to each row conductor further includes an intermediate level pulse arranged to reverse bias the display element in similar manner to the pulsing of the supply line 31 in the Figure 4 embodiment. In Figure 5, $V_{i(N)}$ denotes the selection pulse applied to the Nth row conductor to operate the transistors 32 and 37 of the pixel circuits in that row and $V_{i(N+1)}$ denotes the selection signal applied to the next, (N+1)th row conductor which, because the rows are addressed in sequence, occurs after the signal $V_{i(N)}$. The waveform for each row conductor includes a positive pulse, V_r , which precedes the selection signal and is coincident in time with the selection signal applied to the preceding row conductor 12 so that when the pixel circuits in the preceding row, i.e. the Nth row, are addressed upon the application thereto of $V_{i(N)}$ the positive pulse V_r appearing on the (N+1)th row conductor serves to reverse bias the display elements in the pixel circuits in row N during their sampling phase. The level of V_r is selected so as to provide the desired reverse biasing while being lower than the selection signal V_s so as to ensure that the transistors 32 of 37 and the pixels circuits in the next, (N+1)th row are not turned on.

With regard to all the above-described embodiments, it will be appreciated that although the pixel circuits are based on an n-channel transistor 30, the same modes of operation are possible if the polarity of these transistors is reversed, the display element polarity is reversed, and the polarity of the pulses applied to the supply lines 31 row conductors 12 when used are reversed. Where p-type transistors 33 are used, these would become n-type.

There may be technological reasons for preferring one or other

15

orientation of the diode display elements so that a display device using p-channel transistors is desirable. For example, the material required for the cathode of a display element using organic electroluminescent material would normally have a low work function and typically would comprise a magnesium-based alloy or calcium. Such materials tend to be difficult to pattern photolithographically and hence a continuous layer of such material common to all display elements in the array may be preferred.

It is envisaged that instead of using thin film technology to form the TFTs and capacitors on an insulating substrate, the active matrix circuitry could be fabricated using IC technology on a semiconductor, for example, silicon, substrate. The upper electrodes of the LED display elements provided on this substrate would then be formed of transparent conductive material, e.g. ITO, with the light output of the elements being viewed through these upper electrodes.

15 It is envisaged also that the switches 32, 33 and 37 need not comprise transistors but may comprise other types of switches, for example, micro-relays or micro-switches.

Although the above embodiments have been described with reference to organic electroluminescent display elements in particular, it will be appreciated 20 that other kinds of electroluminescent display elements comprising electroluminescent material through which current is passed to generate light output may be used instead.

The display device may be a monochrome or multi-colour display device. It will be appreciated that a colour display device may be provided by using 25 different light colour emitting display elements in the array. The different colour emitting display elements may typically be provided in a regular, repeating pattern of, for example, red, green and blue colour light emitting display elements.

30 In summary, an active matrix electroluminescent display device has an array of current - driven electroluminescent display elements, for example comprising organic electroluminescent material, whose operations are each controlled by an associated switching means to which a drive signal for

16

determining a desired light output is supplied in a respective address period and which is arranged to drive the display element according to the drive signal following the address period. Each switching means comprises a current mirror circuit in which the same transistor is used to both sense and produce the 5 required drive current for the display element with the gate of the transistor being connected to a storage capacitance on which a voltage determined by the drive signal is stored. This allows variations in transistor characteristics over the array to be compensated and improved uniformity of light outputs from the display elements to be obtained.

10 From reading the present disclosure, other modifications will be apparent to persons skilled in the art. Such modifications may involve other features which are already known in the field of matrix electroluminescent displays and component parts thereof and which may be used instead of or in addition to features already described herein.

CLAIMS

signal on the column address conductor to the input terminal when the first - mentioned switch device is closed.

1. An active matrix electroluminescent display device comprising a matrix array of electroluminescent display elements each of which has an associated switching means for controlling the current through the display element in accordance with an applied drive signal and in which the switch means comprises a drive transistor whose first current - carrying terminal is connected to a first supply line, whose second current - carrying terminal is connected via the display element to a second supply line and whose gate is connected to its first current - carrying terminal via a capacitance, characterised in that the second current - carrying terminal of the drive transistor is connected to an input terminal for the drive signal and in that a switch device is connected between the second current - carrying terminal and the gate of the transistor which is operable during the application of a drive signal so as to store a gate voltage on the capacitance determined by the drive signal.

2. An active matrix electroluminescent display device according to Claim 1, characterised in that the display elements are arranged in rows and columns, and the switch devices of the switching means for a row of display elements are connected to a respective, common, row address conductor via which a selection signal for operating the switch devices in that row is supplied, and each row address conductor is arranged to receive a selection signal in turn, whereby the rows of display elements are addressed one at a time in sequence.

3. An active matrix electroluminescent display device according to Claim 2, characterised in that the drive signals for the display elements in a column are supplied via a respective column address conductor common to the display elements in the column, there being a further switch device connected between the input terminal of the switching means of a display element and its associated column address conductor which is operable to transfer a drive

4. An active matrix electroluminescent display device according to Claim 3, characterised in that the further switch device is connected to the same row address conductor as the first - mentioned switch device and operable simultaneously with that switch device by a selection signal applied to the row address conductor.

5. An active matrix electroluminescent display device according to any one of Claims 2 to 4, characterised in that the first supply line is shared by all the display elements in the same row or column with a respective supply line being provided for each row or column of display elements.

6. An active matrix electroluminescent display device according to Claim 5, characterised in that the first supply line is associated with, and shared by, a row of display elements and comprises the row address conductor associated with a different row of display elements via which a selection signal is applied to the switch devices of the switching means of that different row.

7. An active matrix electroluminescent display device according to any one of the preceding claims, characterised in that a switch device is connected between the second current - carrying terminal of the drive transistor and the display element which is operable to isolate the display element from the drive transistor when the switch device connected between that terminal and the gate of the drive transistor is closed.

8. An active matrix electroluminescent display device according to any one of Claims 1 to 6, characterised in that the first supply line is arranged to receive a pulse signal during the application of a drive signal such as to reverse bias the display element.

9. An active matrix electroluminescent display device according to any one of the preceding claims, characterised in that drive transistors and the switch devices comprise thin film transistors carried on an insulating substrate.

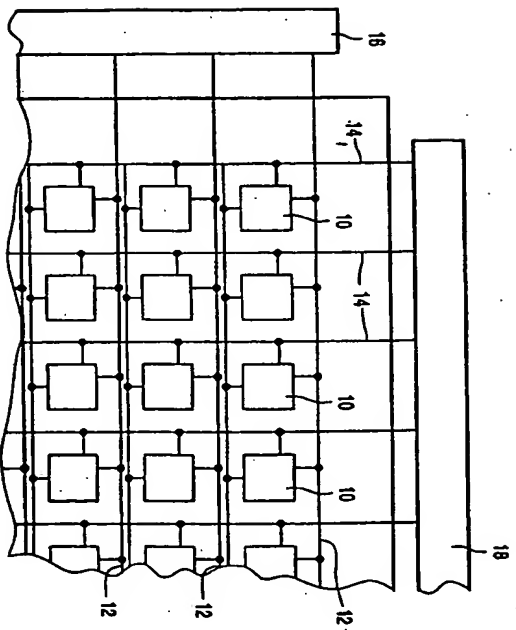


FIG. 1

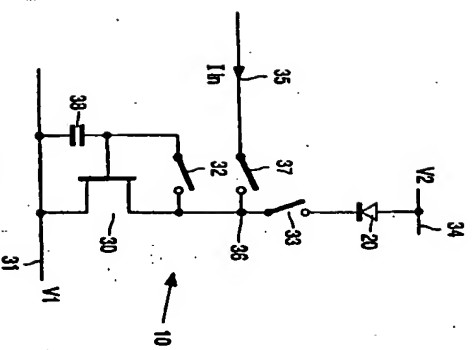


FIG. 2

2/3

3/3

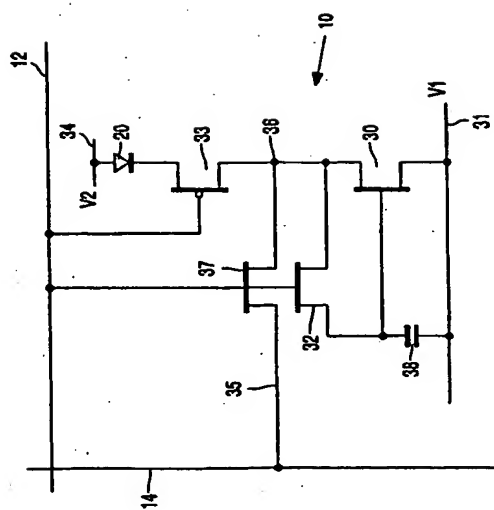


FIG. 3

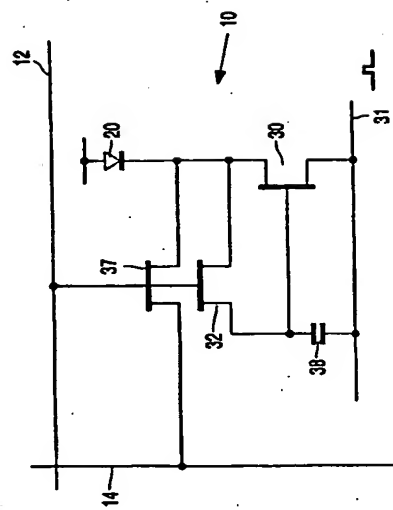


FIG. 4

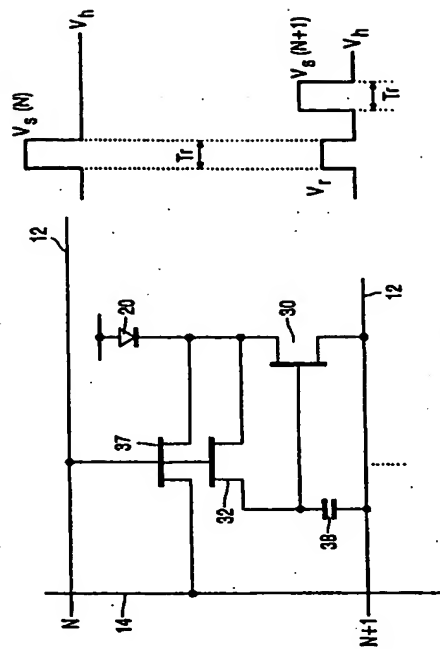


FIG. 5